



**Champion**<sup>®</sup>

The Dishwashing and Glasswashing Machine Specialists



# Effective April 1, 2008 Retail Price List

	Page
Glasswashers .....	2
Undercounter Dishwashing Machines.....	3
Door-Type Dishwashing Machines .....	6
Rack Conveyor Dishwashing Machines .....	8
Upright Conveyor Dishwashing Machines .....	13
Pot, Pan and Utensil Warewashing Machines.....	16
Power Wash Sink Systems .....	19
Circular Conveyor Dishwashing Machines .....	21
Tray Dryer .....	21
Waste Handling Systems .....	21

**Ordering Information:**

**When ordering, please supply the following information: Direction of operation; Type of tank heat; Voltage, cycle and phase; specials or options.** All prices are Retail F.O.B. destination (Yukon and N.W.T. excepted). Terms are net 30 days from date of invoice. All prices are subject to change without notice. All orders are subject to approval and acceptance by factory. Prices do not include provincial or other taxes.



## Glasswashers



### DF

- Fully automatic operation
- 3 built-in chemical dispensers
- 140°F wash
- Cool fresh water rinse
- Approx. 1000, 2-1/2" glasses/hr.
- 208-230/60/1



### SW-400 / SW-600

- Fully automatic operation
- 3 built-in chemical dispensers
- 140°F wash
- Cool fresh water rinse
- Approx. 2000, 2-1/2" glasses/hr.
- Right-to-left or left-to-right operation

### Rotary Models

		Approx. Ship Wt.	Suggested List Price
DF	Rotary glasswasher (clockwise rotation)	204 lbs.	\$ 7520
DF-1	Rotary glasswasher (clockwise rotation)	204 lbs.	7520
DF-70A*	Drain tray and waste collector for rotary glasswasher	8 lbs.	330

\*Glasswasher Warranty: One (1) year parts – (1) year labour. If DF70A is not purchased reduces labour to 90 days.

### Pass Thru Models

		Approx. Ship Wt.	Suggested List Price
SW-400	Pass thru glasswasher	227 lbs.	\$ 11430
SW-600	Pass thru glasswasher	297 lbs.	11950

Specify left to right or right to left operation when ordering.

### Options

		Approx. Ship Wt.	Part #	Suggested List Price
SW12	Stainless steel splash guards for SW400 (2)	Shipped with machine	0708788	\$ 220
SW24	Stainless steel splash guards for SW600 (2)	Shipped with machine	0708789	235
SW46C	Hand sink & wet waste receiver with legs	54 lbs.	0708453	1590
SW48	Stainless steel back for SW400	Shipped with machine	0702882	350
SW72	Stainless steel back for SW600	Shipped with machine	0702886	400
Kit 264	Washdown hose	4 lbs.	0701956	155
Kit 332	Casters – set of 4; 2 locking, 2 stationary	5 lbs.	0701962	795
SW47	Drain tray and waste collector (SW400 & SW600)	2 lbs.	0706204	155
0707258	Quick disconnect package (casters, piping, drain)		0707258	1165

### Automatic Rack Glasswasher

		Approx. Ship Wt. lbs./kg.	Standard Voltages	Suggested List Price
MD 18-1	Single door rack glasswasher	150/68	115/60/1	\$ 6265
MD 18-2	Two door rack glasswasher	150/68	115/60/1	6810
MD 18-1H	Single door rack glasswasher w/high hood	155/68	115/60/1	6810

### Options and Accessories

Racks, additional peg or flat (specify) each	110352 or 110353	\$70
--	------------------	------

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists



# Fill & Dump Undercounter Machines

## Standard Features

- **ENERGY STAR® Qualified** (501HT, 501LT & 401HT Plus)
- Top-mounted user friendly controls
- Scrub cycle provides up to 15 minutes of wash time (501 Series)
- Totally sealed, stainless steel, feather touch cycle switches (501 Series)
- Soft start provides gradual and quiet pump activation
- Powerful, whisper quiet, 1 Hp pump motor
- Optional three phase model available (501HT)
- Fill and dump type operation
- Liquid detergent and rinse-aid dispensing pumps
- Flexible fill and drain lines, flow regulator/line strainer and standard pumped drain
- Quick 141 second cycle time. 21 racks per hour capacity
- 15-3/4" [400mm] door opening
- ★ **Rinse Sentry feature. Ensures proper 180°F final rinse temperature**



(501HT Shown with optional Top & Side Panels)

High Temperature Single Phase		Standard Voltages	Approx. Ship Wt. lbs./kg.	Suggested List Price
501HT	High temperature with built-in booster ( <b>40°F rise</b> ) ★ Rinse Sentry, Detergent and Rinse-Aid pumps included	208/60/1	198/90	<b>\$ 7910</b>
501HT	High temperature with built-in booster ( <b>70°F rise</b> ) ★ Rinse Sentry, Detergent and Rinse-Aid pumps included	208/60/1	198/90	<b>8420</b>
401HT Plus	High temperature with built-in booster ( <b>40°F rise</b> ) ★ Rinse Sentry, Detergent & Rinse-Aid pumps included	208-240/60/1	178/179	<b>6430</b>
401HT Plus	High temperature with built-in booster ( <b>70°F rise</b> ) ★ Rinse Sentry, Detergent & Rinse-Aid pumps included	208-240/60/1	178/179	<b>6930</b>
501HTN	High temperature — <b>no booster</b> Detergent and Rinse Aid pumps included	115/60/1	180/82	<b>6080</b>
Three Phase				
501HT	High temperature with built-in booster ( <b>40°F rise</b> ) ★ Rinse Sentry, Detergent and Rinse-Aid pumps included	208-240/60/3	198/90	<b>8220</b>
501HT	High temperature with built-in booster ( <b>70°F rise</b> ) ★ Rinse Sentry, Detergent and Rinse-Aid pumps included	208-240/60/3	198/90	<b>8720</b>
Low Temperature		Standard Voltages	Approx. Ship Wt. lbs./kg.	Suggested List Price
501LT	Low temperature undercounter Detergent, Sanitizer and Rinse-Aid pumps included	115/60/1	173/79	<b>6480</b>
Options		Part #		
Kit 504, Top and sides		0712390	24/11	<b>500</b>
17RS, 17" Rack Stand (301, 401 & 501 Series)		0708757	17/8	<b>750</b>
Racks, additional peg or flat (specify) each		101285 or 101273	7/3	<b>105</b>
Combination sink/table system with scrapping/soaking sink, lower cabinet (specify direction: sink right OR left of machine)		LH-403561 RH-403562	167/76	<b>2880</b>
Overshelf for CST			10/4.5	<b>890</b>
Sprayhose for CST		100243 (B-0113)	15/7	<b>895</b>
6" rack stand (suitable for all undercounters)		0712393		<b>415</b>

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

# Fresh Water Rinse Undercounter Machines



UH200B

### Standard Features

- Top-mounted user friendly controls
- Scrub cycle provides up to 15 minutes of wash time
- Totally sealed, stainless steel, feather touch cycle switches
- Soft start provides gradual and quiet pump activation
- Powerful, whisper quiet, 1 Hp pump motor
- Optional three phase model available
- Liquid detergent and rinse-aid dispensing pumps
- Flexible fill and drain lines, flow regulator/line strainer and standard pumped drain
- Quick 90 second cycle time. 30 racks per hour capacity
- 15 3/4" [400mm] door opening
- Tank maintenance heater
- ★ *Rinse Sentry feature. Ensures proper 180°F final rinse temperature*

Undercounter UH 200 Series		Standard Voltages	Approx. Ship Wt. lbs./kg.	Suggested List Price
<b>Single Phase</b>				
UH-200B	Champion High Temperature with built-in booster 40° Rise	208-230/60/1	215 lbs.	<b>\$ 8430</b>
UH-200B	Champion High Temperature with built-in booster 70° Rise	208-230/60/1	215 lbs.	<b>8935</b>
<b>Three Phase</b>				
UH-200B	Champion High Temperature with built-in booster 40° Rise	208-240/60/3	215 lbs.	<b>8740</b>
UH-200B	Champion High Temperature with built-in booster 70° Rise	208-240/60/3	215 lbs.	<b>9240</b>
<b>Options</b>			<b>Part #</b>	<b>Suggested List Price</b>
17RS, 17" Rack Stand			0708757	<b>\$ 750</b>
6" Stand			0712393	<b>415</b>
Drain Tempering Kit (401, 501 and UH200 Series)			0712382	<b>625</b>

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

# Fresh Water Rinse Undercounter Machines

## Standard Features

- ★ **Rinse Sentry feature. Ensures proper 180°F/82°C final rinse temperature**
- Built-in electric booster (standard 40°F or optional 70°F rise)
- Pumped drain
- Soft start wash pump
- Low-water tank heat protection
- Detergent and rinse aid pumps
- Quiet double-wall construction
- Door safety switch

- Independent stainless steel interchangeable upper and lower wash and rinse arms
- Fresh water rinse
- Top mounted slide-out controls
- Stainless steel top and side panels
- 150-second total cycle time



301HT

<b>Undercounter 301 Series</b>		<b>Standard Voltages</b>	<b>Approx. Ship Wt. lbs./kg.</b>	<b>Suggested List Price</b>
<b>Single Phase</b>				
301HT	High Temp., 40°F Rise ★ <b>Rinse-Sentry</b> High temperature w/built-in Booster, Fresh Water Rinse	208-230/60/1	165 lbs.	<b>\$ 5550</b>
301HT	High Temp., 70°F Rise ★ <b>Rinse-Sentry</b> High temperature w/built-in Booster, Fresh Water Rinse	208-230/60/1	165 lbs.	<b>6050</b>
<b>Three Phase</b>				
301HT	High Temp., 40°F Rise ★ <b>Rinse-Sentry</b> High temperature w/built-in Booster, Fill and Dump	208-240/60/3	198 lbs.	<b>5900</b>
301HT	High Temp., 70°F Rise ★ <b>Rinse-Sentry</b> High temperature w/built-in Booster, Fill and Dump	208-240/60/3	198 lbs.	<b>6395</b>
<b>Options</b>		<b>Part #</b>		
6" Stand		0710809		<b>415</b>
Drain Tempering Kit (301 only)		0712430		<b>625</b>

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



# Door-Type Dishwashing Machines

## MD1000 Standard Features

- 1 HP pump motor
- Straight-through or corner application – simple field conversion
- Fill and dump operation
- Rinse water always re-used for next cycle's wash

- ★ *Rinse-Sentry feature. Ensures proper 180°F final rinse temperature (HT only)*
- Stainless steel front panel



High Temperature		Standard Voltages	Approx. Ship Wt. lbs./kg.	Suggested List Price
MD-1000HT	High Temperature Door-type with built-in booster (40°F rise)	208-240/60/3		<b>\$ 8320</b>
MD-1000HT	High Temperature Door-type with built-in booster (40°F rise)	208-240/60/1		<b>8555</b>
MD-1000HT	High Temperature Door-type with built-in booster (70°F rise)	208-240/60/3		<b>8555</b>
MD-1000LT	Low Temperature Door-type (Detergent, rinse-aid and sanitizer pumps included)	115/60/1		<b>6840</b>
MDHB	(with built-in booster) Machine must be ordered S/T or Corner	208-240/60/1; 208-230/60/3 460/60/3; 575/60/3	350/159	<b>13880</b>
	Electric 9 kW (40°F rise) (Water pressure regulating valve included)	208-230/60/3 460/60/3; 575/60/3	350/159	<b>14890</b>
	Electric 13 kW (70°F rise) (Water pressure regulating valve included)	208-230/60/1; 208-230/60/3 460/60/3; 575/60/3	350/159	<b>18575</b>
	Steam coil or steam injector with steam booster (40° – 70°F rise) (Water pressure regulating valve included)	208-230/60/1; 208-230/60/3 460/60/3; 575/60/3	350/159	<b>18575</b>
For corner application (Model MDHB-C)			Add	<b>375</b>
MDH-1	Electric (no booster)	115/60/1 or	325/147	<b>12385</b>
MDH-1	Steam injector or steam coil (no booster)	208-230/60/1 or		<b>16630</b>
MDH-1-HWC	Hot water coil tank (no booster)	208-230/60/3 or 460/60/3, 575/60/3		<b>14215</b>
For corner application (Model MDH-1C)			Add	<b>375</b>
Low Temperature		Standard Voltages	Approx. Ship Wt. lbs./kg.	Suggested List Price
MDLF	Low temperature fresh water rinse	208-230/30/1 or 208-230/60/3 or 460/60/3, 575/60/3	325/147	<b>12020</b>
For corner application (Model MDLF-C)			Add	<b>375</b>
Options				Suggested List Price
Additional peg or flat racks (specify type) each				<b>105</b>
Steam pressure regulating valve (unmounted)				<b>865</b>
Water pressure regulating valve (unmounted) Standard on MDHB				<b>230</b>
Vent fan control switch				<b>225</b>
Drain Water Tempering kit				<b>1175</b>

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

# Door-Type Dishwashing Machines

## Standard Features

- Large 27" opening for trays, sheet pans or 60-quart mixing bowl
- Adjustable cycle selector
- Automatic tank fill
- Built-in stainless steel Electric Booster (D-HBT)
- Automatic drain valve
- Door-activated cycle start
- Electric tank heat
- Low-water tank heat protection
- 2-Hp drip-proof pump motor
- Door safety switch
- Interchangeable upper and lower spray arms
- Stainless steel enclosure panels
- Detergent/chemical connection provisions
- Racks: 1 peg rack and 1 flat rack
- Water pressure regulating valve (mounted) MDHBT only



High Hood		Standard Voltages	Approx. Ship Wt.	Suggested List Price
MD-HBT	Electric Booster (40°F rise)	208/60/1; 240/60/1 208/60/3; 240/60/3 480/60/3; 575/60/3	400 lbs.	\$ 21625
	Electric Booster (70°F rise)	208/60/3; 240/60/3 480/60/3; 575/60/3	400 lbs.	22905
	Steam Coil or Steam Injector Steam Booster (40-70°F rise)	208/60/1; 240/60/1 208/60/3; 240/60/3 480/60/3; 575/60/3	400 lbs.	24430
MD-H1T	Electric (no Booster)	208/60/1; 240/60/1 208/60/3; 240/60/3 480/60/3; 575/60/3	350 lbs.	19925
	Steam Coil or Steam Injector (no Booster)	208/60/1; 240/60/1 208/60/3; 240/60/3; 575/60/3	350 lbs.	20035
	Single Source Gas (40° or 70°F rise)	115/60/1; 208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3		39255

Options		Suggested List Price
For Corner Application (Model MDH1TC)	Add	375
Drain water tempering kit (unmounted)		1175
Peg or flat racks (specify type)	(each)	105
Sheet pan rack	(each)	360
Vent fan control switch		225
Water pressure regulating valve (unmounted)		230

NOTE: Machine must be ordered as a Straight-through or Corner Application.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



# Rack Conveyors

## Standard Features

- **ENERGY STAR® Qualified**
- Large 20-3/4" internal vertical clearance
- One-piece stainless steel upper & lower spray arm assemblies
- Wide 26" leakproof doors, internally-fitted
- Anti-jam conveyor drive system
- Energy Sentinel (Idle pump shut-off)
- Convenient top-mounted controls
- Sloped internal surfaces for efficient water return to wash tank
- Automatic tank fill
- Common utility connections
- Door safety switch
- Door activated drain closures
- Enclosure panels (front & sides)
- Splash shields
- Low-water tank heat protection
- Rinse-saver device
- Stainless steel heavy-gauge construction, including base and feet
- Electric tank heat
- Wash pump 2 Hp motor
- Stainless steel pump & impeller
- Internal removable scrap basket

Circulating 300 (US) gallons per hour with only 112 (US) gallons actual fresh water consumption (see page 8)



Model 44DR  
Shown with optional vent cowls

### DualRinse®

## \*High Temperature Single Tank

	Length Between Tables	Approx. Ship Wt.	Suggested List Price
Model 44 DR (44" single tank, dual rinse) <b>ENERGY STAR® Qualified</b>	44"	600 lbs.	Contact Factory
Model 44 DRWS (44" WS, water saver dual rinse) <b>ENERGY STAR® Qualified</b>	44"	600 lbs.	Contact Factory
Model 44 DRHWC (44" single tank, hot water coil dual rinse)	44"	600 lbs.	Contact Factory
Model 54 DR (54" single tank, dual rinse) <b>ENERGY STAR® Qualified</b>	54"	700 lbs.	Contact Factory

## Single Tank with 22" Prewash

Model 66 DRPW (44 w/22" prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	66"	700 lbs.	Contact Factory
Model 66 DRWSPW (44 WS w/22" prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	66"	700 lbs.	Contact Factory
Model 66 DRPWHWC (44" w/22" prewash, dual rinse, hot water coil)	66"		Contact Factory
Model 76 DRPW (54" W/22" prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	76"	800 lbs.	Contact Factory

## Single Tank with 26" Front Feed Prewash

Model 70 DRFFPW (44" single tank, front feed prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	70"	800 lbs.	Contact Factory
Model 70 DRWSFFPW (44" single tank w/front feed & prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	70"	800 lbs.	Contact Factory
Model 70 DRFFPWHWC (44" single tank w/front feed, prewash, hot water coil)	70"	800 lbs.	Contact Factory
Model 80 DRFFPW (54" single tank w/front feed prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	80"	900 lbs.	Contact Factory

## Single Tank with 36" Heavy Duty Prewash

Model 80 DRHDPW (44 single tank w/36" heavy duty prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	80"	700 lbs.	Contact Factory
Model 80 DRWSHDPW (44 WS w/36" heavy duty prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	80"	700 lbs.	Contact Factory
Model 80 DRHDPWHWC (44" single tank w/36" heavy duty prewash, dual rinse, hot water coil)	70"	800 lbs.	Contact Factory
Model 90 DRHDPW (54" single tank w/36" heavy duty prewash, dual rinse) <b>ENERGY STAR® Qualified</b>	90"	900 lbs.	Contact Factory

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

# Rack Conveyors

## E-SERIES

<b>*High Temperature Single Tank</b>	<b>Length Between Tables</b>	<b>Approx. Ship Wt.</b>	<b>Suggested List Price</b>
<i>Model 44 (44" single tank, final rinse)</i>	44"	600 lbs.	<b>Contact Factory</b>
<b>Single Tank with 22" Prewash</b>			
<i>Model 66 PW (44" single tank with 22" prewash)</i>	66"	700 lbs.	<b>Contact Factory</b>
<b>Single Tank with 36" Heavy Duty Prewash</b>			
<i>Model 80 HDPW (44" single tank, with 36" heavy duty prewash)</i>	80"	700 lbs.	<b>Contact Factory</b>
<b>Single Tank with 26" Front Feed Prewash</b>			
<i>Model 70 FFPW (44" single tank, with 26" front feed prewash)</i>	70"	800 lbs.	<b>Contact Factory</b>
<b>Two Tank</b>			
<i>Model 64 (64" two tank) ENERGY STAR® Qualified</i>	64"	865 lbs.	<b>Contact Factory</b>
<i>Model 84 (84" two tank) ENERGY STAR® Qualified</i>	84"	950 lbs.	<b>Contact Factory</b>
<b>Two Tank with 22" Prewash</b>			
<i>Model 86 PW (64" two tank with 22" prewash) ENERGY STAR® Qualified</i>	86"	1015 lbs.	<b>Contact Factory</b>
<i>Model 106 PW (84" two tank with 22" prewash) ENERGY STAR® Qualified</i>	106"	1055 lbs.	<b>Contact Factory</b>
<b>Two Tank with 36" Heavy Duty Prewash</b>			
<i>Model 100 HDPW (64" two tank with 36" prewash, heavy duty) ENERGY STAR® Qualified</i>	100"	1265 lbs.	<b>Contact Factory</b>
<i>Model 120 HDPW (84" two tank with 36" prewash, heavy duty) ENERGY STAR® Qualified</i>	120"	1295 lbs.	<b>Contact Factory</b>
<b>Two Tank with 26" Front Feed Prewash</b>			
<i>Model 90 FFPW (64" two tank w/26" front feed prewash) ENERGY STAR® Qualified</i>	90"	900 lbs.	<b>Contact Factory</b>
<i>Model 110 FFPW (84" two tank w/26" front feed prewash) ENERGY STAR® Qualified</i>	110"	1000 lbs.	<b>Contact Factory</b>
<b>*Low Temperature</b>	<b>Length Between Tables</b>	<b>Approx. Ship Wt.</b>	<b>Suggested List Price</b>
<i>44LT (44" single tank)</i>	44"	600 lbs.	<b>Contact Factory</b>
<i>66LTPW (44" with 22" prewash)</i>	66"	700 lbs.	<b>Contact Factory</b>

Above models available in any of the following voltages: 208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3.

\*When ordering, please specify the direction of operation, voltage and phase.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



# Rack Conveyors

## E-SERIES

<b>Tank Heat (specify one)</b>	<b>Suggested List Price</b>
Electric with thermostat and low-water cutoff	<b>Standard – No Charge</b>
SST closed steam coil or injector with thermostat and low-water cutoff	
Single tank (E-Series, 44 & 54 Series)	<b>Contact Factory</b>
Two tank (E-Series, 64 and 84 Series)	<b>Contact Factory</b>
For low pressure (10-14 PSI) Steamcoil	add <b>Contact Factory</b>
<b>Options</b>	
Stainless steel vent cowl with 7" stack and locking dampers	each <b>Contact Factory</b>
Table limit switch (unmounted) recommended on all rack conveyor installations)	<b>Contact Factory</b>
Cold water thermostat for prewash section (comes with pressure regulating valve)	<b>Contact Factory</b>
Machine insulation (hoods and back panels)	per inch of machine <b>Contact Factory</b>
Racks: Peg or flat racks (specify type)	each <b>Contact Factory</b>
Vertical clearance through machine: 24"	per inch of machine <b>Contact Factory</b>
PR-36 – prewash for: KL-44 and 54-KB (36" length) (Shipping wt: 400 lbs/182 kg)	<b>Contact Factory</b>
FF-PR26 – front feed prewash for 44LT (26" length) (Shipping wt: 250 lbs/114 kg)	<b>Contact Factory</b>
Blower-dryer, including 60" hood, table legs and pawl bar assembly (Shipping wt: 600 lbs/273 kg)	<b>Contact Factory</b>
Water pressure regulating valve (unmounted; standard with booster, standard with KL and Water Saver series)	<b>Contact Factory</b>
Steam pressure regulating valve (unmounted)	<b>Contact Factory</b>
Dwell switch	<b>Contact Factory</b>
Vent fan control	<b>Contact Factory</b>
Booster interconnect relay (gas booster only)	<b>Contact Factory</b>
Drain water tempering kit (unmounted)	<b>Contact Factory</b>
<b>Booster Heaters</b> (Shipping Weight: 150 lbs.) All prices reflect mounted and piped boosters	
<b>E-Series Electric</b>	
40°F rise (27 kW)	<b>Contact Factory</b>
60°F rise (36 kW)	<b>Contact Factory</b>
44 Series Models only	70°F rise (48 kW) External <b>Contact Factory</b>
<b>E-Series Electric</b>	
40°F rise (15 kW)	<b>Contact Factory</b>
64 & 84 Models	70°F rise (24 kW) <b>Contact Factory</b>
E-Series Steam	
40°F rise	<b>Contact Factory</b>
70°F rise	<b>Contact Factory</b>
NOTE: For low pressure steam applications, contact Factory.	
<b>Booster Heaters</b> (Shipping Weight: 150 lbs.) All prices reflect mounted and piped boosters	
<b>Dual Rinse Electric</b>	
40°F rise only (12 kW)	<b>Contact Factory</b>
44 & 54 Series Models only	70°F rise (22 kW) <b>Contact Factory</b>
<b>Dual Rinse Electric</b>	
40°F rise (10 kW)	<b>Contact Factory</b>
Water Saver Models only	70°F rise (16 kW) <b>Contact Factory</b>
E-Series Steam	
40°F rise	<b>Contact Factory</b>
70°F rise	<b>Contact Factory</b>

Above models available in any of the following voltages: 208/60/1; 240/60/1; 208/60/3; 240/60/3; 480/60/3; 575/60/3.

\*When ordering, please specify the direction of operation, voltage and phase.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

# Modular Series Rack Conveyors

## Standard Features

- Automatic tank fill
- Common utility connections
- Control circuit, 120-Volt
- Door safety switch
- Door-activated drain closure
- Stainless steel enclosure panels
- Energy Sentinel (idle pump shut-off)
- Rinse saver device
- Vent fan control
- Separate 1/4-Hp conveyor drive motor
- Splash-proof top-mounted controls
- Electric tank heat (with low water tank heat cut-off)
- Total stainless steel construction
- 1-Hp prewash pump motor
- 2-Hp wash/rinse pump motors
- Racks: 2 peg racks and 1 flat rack



<b>*High Temperature</b>	<b>Suggested List Price</b>
44 Modular Series (Corner Application)	<b>Contact Factory</b>
64 Modular Series (Corner Application)	<b>Contact Factory</b>
Vertical clearance through machine: 24"	<b>Contact Factory</b>
<b>Tank Heat (specify one)</b>	
Electric with thermostat and low-water cutoff	<b>Standard – No Charge</b>
SST closed steam coil or injector with thermostat and low-water cutoff	
Single tank (E-Series, 44 Series)	<b>Contact Factory</b>
Two tank (E-Series, 64 and 84 Series)	<b>Contact Factory</b>
For recirculated hot water coil heat	<b>Contact Factory</b>
<b>Options</b>	
Cold water thermostat for prewash section	<b>Contact Factory</b>
Drain water tempering kit (unmounted)	<b>Contact Factory</b>
Vent fan control switch	<b>Contact Factory</b>
Racks: Peg or flat racks (specify type)	<i>each</i> <b>Contact Factory</b>
24" vertical clearance	<b>Contact Factory</b>
Stainless steel vent cowl with 7" stack and locking dampers	<i>each</i> <b>Contact Factory</b>
Steam pressure regulating valve (unmounted)	<b>Contact Factory</b>
Table limit switch (unmounted) (recommended on all rack conveyor installations)	<b>Contact Factory</b>
Water pressure regulating valve (unmounted; standard with booster)	<b>Contact Factory</b>
<b>Booster Heaters</b> (Shipping Weight: 150 lbs.) All prices reflect mounted and piped boosters.	
<b>Electric Modular Machines</b>	
40°F rise only	<b>Contact Factory</b>
70°F rise	<b>Contact Factory</b>
<b>Steam Booster</b>	
40°F rise only	<b>Contact Factory</b>
70°F rise	<b>Contact Factory</b>

NOTE: For low pressure steam applications, contact Factory. Contact factory for shipping weights.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



# Rack Conveyor Machine Options

Model MRC 90  
90° Motorized  
Rack Curve  
*(Must be ordered with  
Roller Conveyor Table)*



Model MRC 180  
180° Motorized  
Rack Curve  
*(Must be ordered with Roller  
Conveyor Table)*



Cantilever  
Sideloader *(No  
hood)*

Model RCT 64 or  
RCT 84  
Roller  
Conveyor Table



## Rack Conveyor Machine Systems

	Approx. Ship Wt.	Suggested List Price
MRC 90 – 90° Motorized Rack Curve (must include Champion Roller Conveyor Table)	150 lbs.	Contact Factory
MRC 180 – 180° Motorized Rack Curve (must include Champion Roller Conveyor Table)	250 lbs.	Contact Factory
RCT 64 – 64" Roller Conveyor Table (mobile or stationary), load or unload	90 lbs.	Contact Factory
RCT 84 – 84" Roller Conveyor Table (mobile or stationary), load or unload	115 lbs.	Contact Factory
Non-standard lengths		Contact Factory
Cantilever Sideloader		
No Hood    24"		Contact Factory
30"		Contact Factory
With Hood  24"		Contact Factory
30"		Contact Factory
Extended Pawl Bar (extended drive unit)		Contact Factory

NOTE: Consult Factory for booster location when ordering Rack Advance and Roller Tables.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

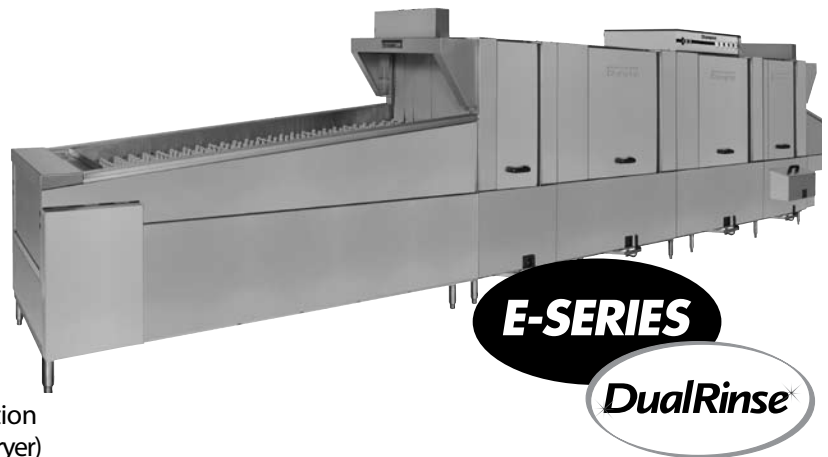


The Dishwashing and Glasswashing Machine Specialists

# Upright Conveyor (EUC) Series

## Standard Features

- **Exclusive Dual Rinse Technology**
- All-purpose 29"-wide peg belt (*SlimLine* 24" belt available)
- Automatic tank fill
- Chemical dispensing equipment connection provisions
- Choice of tank heat: electric, steam coils or direct steam injectors
- Common hot water connection
- Common drain connection
- Common electric connection (separate connection required for optional electric booster and blower-dryer)
- One piece stainless steel wash/rinse manifold system, easy to remove
- Door safety switch
- Electric eye energy sentinel (idle pump shut-off)
- Easy-to-reach top-mounted controls
- Heavy-gauge stainless construction
- Low-water tank heat protection
- Push-button start-stop station – load end
- Recirculating flushing nozzles – load end with prewash
- Rinse saver device
- Conveyor shut-off shelf – unload end
- Stainless steel enclosure panels – front & ends



(EUCCW8 Dual Rinse Shown)





## General Information

The Champion Upright Conveyor dishwashing machines consist of modular sections: load, prewash, wash-rinse, Dual Rinse and unload. Each section is available in a choice of lengths to provide maximum space, labor and production efficiency.

To accommodate various production levels and ware sizes, select from three (3) conveyor widths.

**EUCC Series:** 24" wide conveyor belt.

**EUCCW Series:** 29" wide conveyor belt.

Sectional Construction	
A 	<p><b>* LOAD</b></p> <p>A 2.5 ft. minimum length. For more loading area, order in 1 ft. increments.</p> <p>* 2.5 ft. load is of cantilever design</p>
B 	<p><b>PREWASH</b></p> <p>B2.5 2.5 ft. prewash with standard external scrap basket and 1-Hp pump motor.</p> <p>B4 4 ft. prewash with optional external scrap basket. 3-Hp pump motor is standard.</p>
C 	<p><b>WASH – RINSE</b></p> <p>C4 4 ft. wash for CW and C Series (Contact factory for application)</p> <p>C6 6 ft. wash-rinse combination for CW and C Series</p> <p>C8 8 ft. wash-rinse combination for CW and C Series</p>
D 	<p><b>DUAL – RINSE / UNLOAD</b></p> <p>D2 2 ft. Water Saver Section (CW Series only)</p> <p>D5 5 ft. Unload Section (minimum)</p> <p>Minimum 5 ft. length (Contact factory for application)</p> <p>Additional length available in 1 ft. increments for greater drying efficiency.</p>

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists



Dishwashing Machine Price List  
Effective April 1, 2008  
Supersedes all previous lists

# Upright Conveyor (EUC) Series

## MODULAR SECTIONS FOR EUC SERIES DISHWASHING MACHINES

<b>LOAD (A)</b>	<b>2.5' load</b> (minimum load section) (3 ft. load section is a cantilever design) Additional lengths available in 1 ft. increments
<b>PREWASH (B)</b>	<b>2.5' prewash</b> with external scrap basket (standard) <b>4' prewash</b> without external scrap basket with external scrap basket
<b>WASH-RINSE (C)</b>	<b>4' wash</b> (contact factory for application) without external scrap basket with external scrap basket <b>6' wash-rinse combination</b> without external scrap basket with external scrap basket on wash and/or rinse <b>8' wash-rinse combination</b> without external scrap basket with external scrap basket on wash and/or rinse
<b>DUAL RINSE/UNLOAD (D)</b>	<b>5' unload</b> (5' minimum unload section) (contact factory for application) Additional lengths available in 1 ft. increments

Approximate Shipping Weight: EUCC Series: 150 lbs. per foot  
EUCCW Series – Dual Rinse Series: 175 lbs. per foot

### Standard Tank Heat (specify one)

- Electric heaters with thermostat and positive low-water cut-off
- Closed stainless steel coils with thermostat and positive low-water cut-off
- Steam injectors with thermostat and positive low-water cut-off

**NOTE: Booster optional** Built-in steam boosters are available on all unload sections or built-in electric boosters.

**For Pricing on Upright Conveyors – Contact Factory**

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)





The Dishwashing and Glasswashing Machine Specialists

## Upright Conveyor (EUC) Series

### C and CW Options

- Back panel, stainless steel
- Belts, All purpose peg belt standard
  - Flat belt
  - Cup belt
  - Insulated tray belt
  - Silverware belt
  - Belts with upper rods
  - BELTS – ANY COMBINATION OF ABOVE
  - (Belt with all stainless steel components for Correctional applications – Special Order only)
- Blower Dryer – must have 9 ft. or greater unload, steam or electric (Approximate Shipping Weight: 400 lbs.)
- Bumper rail – machine mounted
- Cold water thermostat (for prewash)
- Conveyor, variable speed, electric
- Doors, 1-piece liftout for low ceiling installations
- Lift out door (low ceiling application)
- Drain interlock switches
- Insulated hoods, insulated lower panels
- Isolation switches for motor and/or electric tank heat
- Motor, pump, 2-Hp optional in lieu of 1-Hp on 2.5 ft. prewash
- Motor, pump, 3-Hp optional in lieu of 1-Hp on 2.5 ft. prewash
- Split unload (D section)
- Start/Stop station, unload end
- Steam pressure regulating valve (unmounted)
- Water pressure regulating valve (mounted) (standard with built-in booster)

**CHAMPION STEAM BOOSTER** – (Built-in) (Shipping Weight: 75 lbs.)  
EUCC/EUCCW (40°F max. rise) EUCC/EUCCW (70°F max. rise)

**CHAMPION ELECTRIC BOOSTERS** – (Built-in) (Shipping Weight: 150 lbs.)  
EUCC/EUCCW (40°F max. rise) EUCC/EUCCW (70°F max. rise)

**NOTE: Electric boosters – contact Factory for location**  
**Available voltages: 208/60/3; 240/60/3; 480/60/3; 575/06/3**  
**For non-standard voltages, contact Factory**

Installation Supervision (within the Continental U.S. and Canada): Provided by factory authorized personnel at no additional cost for ONE day during regular working hours only. The warranty will begin after factory supervision and approval is completed. Subject to standard warranty terms. **Allow 2 weeks for scheduling Factory supervision.**

★ ★ Please contact factory for information on our W-6 Upright Conveyor ★ ★

For Pricing on Upright Conveyor Options – Contact Factory

NOTE: Options prices apply only when ordered with machine.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)



# Pot, Pan & Utensil Warewashing Machines

## Standard Features

- Tank heater electric (steam coil or steam injector optional)
- Low-water tank heat cut-off
- 7.5-Hp drip-proof wash pump motor
- Control circuit, 120-Volt
- Counter-balanced door system
- Detergent/chemical connection provisions
- Door safety switch on each door
- Stainless steel enclosure panels (front and sides)
- Interchangeable upper and lower wash and rinse arms
- Fully-automatic wash and rinse cycle
- External lift-out refuse basket
- Recessed, front-mounted controls
- Integral 6" shelf on front-loading model
- Hold-down grid for light ware protection
- Automatic tank fill
- Vent connection, 6" diameter

NOTE: When ordering PP-28, specify type and quantity of optional racks required.



	Standard Voltages	Approx. Ship Wt.	Suggested List Price
<b>PP-28</b>			
Straight-through, corner or front-loading operation	208- 240/60/3 480/60/3; 575/60/3	800 lbs.	Contact Factory
<b>Tank Heat</b> (specify one)			
Electric heat with thermostat and low-water cut-off			Standard – No Charge
Stainless steel closed steam coil with thermostat and low-water cut-off			Contact Factory
<b>Options</b>			
Exhaust fan (1/3 Hp)		65 lbs.	Contact Factory
Rack: Bake sheet, stainless steel			Contact Factory
Rack: Basket, stainless steel			Contact Factory
Rack: Counter pan, stainless steel			Contact Factory
Rack: General utility, stainless steel			Contact Factory
Steam pressure regulating valve			Contact Factory
Water pressure regulating valve (unmounted) (Standard with built-in booster)			Contact Factory
<b>Booster Heaters</b> (Shipping Weight: 150 lbs.) All prices reflect mounted and piped boosters.			
Steam (stainless steel)			
40°F rise - built-in (externally mounted with cover – corner models)			Contact Factory
70°F rise - built-in (externally mounted with cover – corner models)			Contact Factory
Electric (stainless steel)			
40°F rise built-in (externally mounted with cover on corner models)			Contact Factory
70°F rise (externally mounted with cover)			Contact Factory

NOTE: Options prices apply only when ordered with machine. NOTE: For low pressure steam application, contact Factory.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

# Pot, Pan and Utensil Machines

<b>Undercounter Washer</b>		<b>Suggested List Price</b>	
<b>UTC-6 (electric only)</b>		<b>Contact Factory</b>	
<b>Options</b>			
Steam extraction fan		<b>Contact Factory</b>	
Single phase wash pump motor		<b>Contact Factory</b>	
Additional stainless steel wash racks (each)		<b>Contact Factory</b>	
Stainless steel mesh utensil basket with hinged lid (each)		<b>Contact Factory</b>	
<b>Utensil Washers</b>	<b>Electric Tank Booster Heater Suggested List Price</b>	<b>Steam Tank &amp; Booster Heater Suggested List Price</b>	<b>*Gas Tank &amp; Booster Heater Suggested List Price</b>
<b>Model UTM-10</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-10</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model SD-10</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-12-PT</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-12-CPT</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-20</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model SD-20</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-20-PT</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model SD-36</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-6-PT</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Model LD-36</b>	<b>Contact Factory</b>	<b>Contact Factory</b>	<b>Contact Factory</b>
<b>Options</b>			
Steam extraction fan (All models except LD-20-PT & SD-36)		<b>Contact Factory</b>	
Steam extraction fan (LD-20-PT & SD-36)		<b>Contact Factory</b>	
Single phase wash pump motor (UTM-10, LD-10, SD-10)		<b>Contact Factory</b>	
Single phase wash pump motor (LD-12-PT, LD-12-CPT, LD-20, SD-20)		<b>Contact Factory</b>	
Automatic drain (All models except LD-10)		<b>Contact Factory</b>	
Stainless steel pumped rinse system with electric/gas/steam coil booster heater (SD-36, LD-20-PT)		<b>Contact Factory</b>	
Utensil rack with hold-down lid		<b>Contact Factory</b>	
Stainless steel mesh utensil basket with hinged lid		<b>Contact Factory</b>	
Molded plastic utensil basket for small items		<b>Contact Factory</b>	
Stainless steel insert for tray/sheet pans (UTM-10, SD-10, SD-20, SD-36)		<b>Contact Factory</b>	
Stainless steel insert for muffin/cake pans (UTM-10, SD-10, SD-20, SD-36)		<b>Contact Factory</b>	
Tray/sheet pan rack (LD-10, LD-12-PT, LD-12-CPT, LD-20, LD-20-PT)		<b>Contact Factory</b>	
Stainless steel muffin/cake pan rack (LD-10, LD-12-PT, LD-12-CPT, LD-20, LD-20-PT)		<b>Contact Factory</b>	
575/60/3	5 Hp motor	<b>Contact Factory</b>	
575/60/3	7 or 10 Hp motor	<b>Contact Factory</b>	
575/60/3	15 Hp motor	<b>Contact Factory</b>	

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

Dishwashing Machine Price List  
Effective April 1, 2008  
Supersedes all previous lists

# Pot, Pan and Rack Machines

<b>Rack Washers</b>	<b>Electric Wash Electric Rinse Sugg. List Price</b>	<b>Live Steam Wash Steam Coil Rinse Sugg. List Price</b>	<b>Steam Coil Wash Steam Coil Rinse Sugg. List Price</b>	<b>Gas Wash Gas Rinse Sugg. List Price</b>
<b>1527-N (Electric, gas or steam booster)</b>	Contact Factory	Contact Factory	Contact Factory	Contact Factory
<b>1536-N (Electric, gas or steam booster)</b>	Contact Factory	Contact Factory	Contact Factory	Contact Factory
<b>2554 (Electric, gas or steam booster)</b>	Contact Factory	Contact Factory	Contact Factory	Contact Factory
<b>2566 (Electric, gas or steam booster)</b>	Contact Factory	Contact Factory	Contact Factory	Contact Factory
<b>3072 (Electric, gas or steam booster)</b>	Contact Factory	Contact Factory	Contact Factory	Contact Factory

<b>Options</b>	<b>Sugg. List Price</b>
Automatic drain	Contact Factory
12" steam ext. fan	Contact Factory
Fold away ramp system	Contact Factory
Additional pit grid	Contact Factory
Water pressure regulator (N/A to 3072,2566)	Contact Factory
Rinse tank with steam coil booster heater (N/A to 3072,2566)	Contact Factory
Stainless steel pumped rinse system with electric/gas/steam coil booster heater (standard on 3072, 2566)	Contact Factory
Stainless steel hood assembly	Contact Factory
15" Stainless steel hood assembly with steam extraction fan	Contact Factory
Pass-thru second door and extended cabinet	Contact Factory

<b>Roll-in Rack Options (Stainless Steel)</b>					
	<b>Model 1527</b>	<b>Model 1536-B &amp; N</b>	<b>Model 2554</b>	<b>Model 2566</b>	<b>Model 3072</b>
Stainless steel utensil rack	Contact Factory	Contact Factory	Contact Factory	Contact Factory	Contact Factory
4 tier bucket rack	Contact Factory	Contact Factory	Contact Factory	Contact Factory	Contact Factory
Combo rack	Contact Factory	Contact Factory	Contact Factory	Contact Factory	Contact Factory
Steam table pan rack	Contact Factory	Contact Factory	Contact Factory	Contact Factory	Contact Factory
Cake pan rack	Contact Factory	Contact Factory	Contact Factory	Contact Factory	Contact Factory

NOTE: For Pot and Pan Washers listed on pages 16 & 17, specifications and terms will be those in effect at the time of shipment, and prices are subject to change without notice.

NOTE: Standard Champion warranty, terms and conditions apply except freight.

**For Pricing on above Pot, Pan and Rack Machines – Contact Factory**

NOTE: Options prices apply only when ordered with machine.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)





The Dishwashing and Glasswashing Machine Specialists

# Power Wash Sink Systems

## Model PP-3 Taskmaster

- Type 304 polished stainless steel construction
- 14 gauge stainless tanks and drain boards
- 10" high x 3-1/4" deep back splash
- Twist handle drains
- Taskmaster Control System Single Cycle Microprocessor Control Integrated low water detection Plug and play service system
- Stainless steel legs and cross rails
- Stainless steel adjustable bullet feet
- Dual stainless steel pump and impeller
- Self-draining pump systems
- Stainless steel front skirting
- Multi-sided discharge
- Removable discharge plates
- Centrifugal pump with 4" diameter intake and 3" diameter outlet

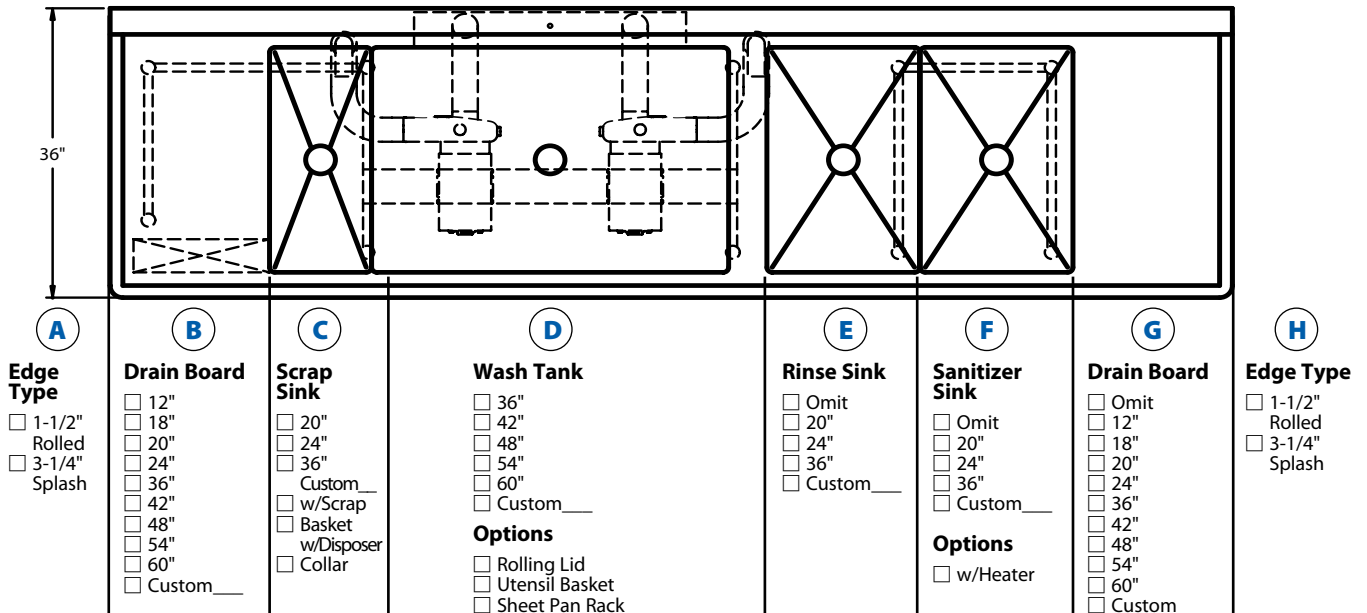


**NEW!**

- Two - 1-1/2 HP fully enclosed (TEFC) wash pump motors with permanently sealed bearings
- Inherent motor overload protection, manual reset
- Low water protection for wash pump motor
- 2,500 watt wash tank heater
- 1 year parts and labor warranty

★ ★ Consult the factory for custom lengths & widths and for pricing on Power Wash Sink Systems ★ ★

Plan View



NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)



# Power Wash Sink Systems Options

## Model PP-3 *Taskmaster*

- 480/60/3 electrical; 575/60/3
  - Utensil basket
  - Removable wash tank cover
  - Sheet pan rack
  - 5,000 watt wash tank heater
  - Sanitize tank heat
  - Pot and pan rack
  - Table mounted over shelf
  - Stainless steel under shelving
  - 1/2" pre-rinse faucet
  - 1/2" fill faucet
  - Multi-Taskmaster
    - Variable speed
    - Temperature control
    - Programmable wash cycle
    - Integrated soap dispensing
  - Auto Fill
  - Auto Drain
- Direction from soiled to clean end (select one)
- Left to right
  - Right to left



(Optional - Multi-Taskmaster Controls Shown)

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)



The Dishwashing and Glasswashing Machine Specialists

# Circular Conveyor CC Series

## The complete warehandling system!

The Circular Conveyor offers high-volume operators a choice of continuous dish rack or direct loading conveyor belts. Custom designed for specific applications, this system is available in high or low temperature models and with a complete line of deluxe options, such as sinks, troughs, disposers, overhead shelves, insulated hoods, a space-saving prewash unit on the radius, and a 24-inch vertical clearance to accommodate large trays. The access doors may be located on the inside or outside of the circle. 200 to 331 racks per hour (NSF rated).

Installation Supervision (Continental U.S.): Provided by factory authorized personnel at no additional cost of one day during regular working hours only. The warranty will begin after factory supervision and approval of final installation is completed subject to standard warranty terms.

Consult Factory for pricing on Champion CC Machines.



# Tray Dryer



## CTD-1800H

Horizontal Tray Dryer for Standard Cafeteria Trays  
 (Sample Tray Required)

Approximate  
Shipping Wt.

800 lbs.

Suggested  
List Price

P.O.R.

# Waste Handling Systems

**P5-24 Features:** 24" slurry chamber, top cover with integral loading trough, and interconnecting water extractor and remote control panel.

**P5-30/P7-30 Features:** 30" slurry chamber on antivibration mounts, trough connection, interconnecting water extractor with flushing system, deodorizer injector, and remote control panel.



(Model P5-24 shown)

Model	Approx. Ship Wt.	Suggested List Price
P5-24 (5-Hp)	1,000 lbs.	Contact Factory
P5-30 (5-Hp)	1,000 lbs.	Contact Factory
P7-30 (7.5-Hp)	1,100 lbs.	Contact Factory
Options		
Recirculating Pump	100 lbs.	Contact Factory
Trough Connection	50 lbs.	Contact Factory
Extractor flushing system	N/A	Contact Factory
Hose Reel (30 ft.) (unmounted)	44 lbs.	Contact Factory
Automatic Shutdown Timer	10 lbs.	Contact Factory
Deodorizer injector	N/A	Contact Factory
Remote Start-Stop Station (unmounted)	N/A	Contact Factory
Sound Insulated Panels		Contact Factory

Available voltages: 208V/60/3; 240V/60/3; 480V/60/3; 575/60/3

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)



The Dishwashing and Glasswashing Machine Specialists

Dishwashing Machine Price List  
Effective April 1, 2008  
Supersedes all previous lists

## Limited Warranty

Champion Moyer Diebel (herein referred to as Moyer Diebel, 2674 North Service Road, Jordan Station, Ontario, L0R 1S0) warrants machines, and parts, as set out below.

**Warranty of Machines:** Moyer Diebel warrants all new machines of its manufacture bearing the name Champion and/or Moyer Diebel and installed within Canada to be free from defects in material and workmanship for a period of one (1) year after the date of installation or fifteen (15) months after the date of shipment by Moyer Diebel, whichever occurs first. The warranty registration card must be returned to Moyer Diebel within ten (10) days after installation. If warranty card is not returned to Moyer Diebel within such period, the warranty will expire after one year from the date of shipment. Moyer Diebel will not assume any responsibility for extra costs for installation in any area where there are jurisdictional problems with local trades or unions.

If a defect in workmanship or material is found to exist within the warranty period, Moyer Diebel, at its election, will either repair or replace the defective machine or accept return of the machine for full credit. In the event that Moyer Diebel elects to repair, the labor and work to be performed in connection with the warranty shall be done during regular working hours by a Moyer Diebel authorized service technician. Defective parts become the property of Moyer Diebel. Use of replacement parts not authorized by Moyer Diebel will relieve Moyer Diebel of all liability in connection with its warranty. In no event will Moyer Diebel's warranty obligation exceed Moyer Diebel's charge for the machine.

The following are not covered by Moyer Diebel's warranty:

- a. Lighting of gas pilots or burners.
- b. Cleaning of gas lines.
- c. Replacement of fuses or resetting of overload breakers.
- d. Adjustment of thermostats.
- e. Adjustment of clutches.
- f. Opening or closing of utility supply valves or switching of electrical supply current.
- g. Cleaning of valves, strainers, screens, nozzles, or spray pipes.
- h. Performance of regular maintenance and cleaning as outlined in operator's guide.
- i. Damages resulting from water conditions, accidents, alterations, improper use, abuse, tampering, improper installation, or failure to follow maintenance and operation procedures.
- j. Wear on Pulper cutter blocks, pulse vanes, and auger brush.

Examples of the defects not covered by warranty include, but are not limited to: (1) Damage to the exterior or interior finish as a result of the above, (2) Use with utility service other than that designated on the rating plate, (3) Improper connection to utility service, (4) Inadequate or excessive water pressure, (5) Corrosion from chemicals dispensed in excess of recommended concentrations, (6) Failure of electrical components due to connection of chemical dispensing equipment installed by others, (7) Leaks or damage resulting from such leaks caused by the installer, including those at machine table connections or by connection of chemical dispensing equipment installed by others, (8) Failure to comply with local building codes, (9) Damage caused by labor dispute.

**Warranty of Parts:** Moyer Diebel warrants all new machine parts produced or authorized by Moyer Diebel to be free from defects in material and workmanship for a period of 90 days from date of invoice. If any defect in material and workmanship is found to exist within the warranty period, Moyer Diebel will replace the defective part without charge.

**DISCLAIMER OF WARRANTIES AND LIMITATIONS OF LIABILITY.** MOYER DIEBEL'S WARRANTY IS ONLY TO THE EXTENT REFLECTED ABOVE. MOYER DIEBEL MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY, OR FITNESS OF PURPOSE. MOYER DIEBEL SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. THE REMEDIES SET OUT ABOVE ARE THE EXCLUSIVE REMEDIES FOR ANY DEFECTS FOUND TO EXIST IN MOYER DIEBEL DISHWASHING MACHINES AND MOYER DIEBEL PARTS, AND ALL OTHER REMEDIES ARE EXCLUDED, INCLUDING ANY LIABILITY FOR INCIDENTALS OR CONSEQUENTIAL DAMAGES.

Moyer Diebel does not authorize any other person, including persons who deal in Moyer Diebel dishwashing machines, to change this warranty or create any other obligation in connection with Moyer Diebel dishwashing machines.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.

Champion Moyer Diebel • 2674 North Service Rd., Jordan Station, Ontario, L0R 1S0 • 905/562-4195 • Fax 905/562-4618 [sales@moyerdiebellimited.com](mailto:sales@moyerdiebellimited.com)





The Dishwashing and Glasswashing Machine Specialists

## Terms & Conditions of Sale

- 1. TERMS.** Moyer Diebel, Inc. is referred to herein as "Seller." The purchaser of the property subject hereto ("Property") is referred to as "Buyer."

No terms or conditions other than those stated herein shall be applicable to the state of the Property unless incorporated as part of the order or quotation constituting a part of the Purchase Agreement described below. The Laws of the Province of Ontario will govern this Agreement and all transactions hereunder as to interpretation, enforcement, validity, construction, effect and in all other respects.
- 2. PURCHASE AGREEMENT.** Any order for or offer to purchase the Property shall not be binding on the Seller unless it is accepted in writing by the Seller's acknowledgment reflecting such acceptance. When so accepted it shall be binding in accordance with the Terms and Conditions of Sale. No modifications shall be permitted unless agreed to in writing by the parties. Unless otherwise specifically agreed in writing, any delivery or shipping date shown, or mentioned by the Seller, is furnished only for the convenience of the Buyer, is estimated, and is not a date by which the Seller has agreed to ship or deliver the Property.

Change orders for the Property will not be permitted without the Seller's consent. The Seller may impose a charge in connection with any change order that the Seller accepts.

Each shipment or delivery is subject to Seller's approval of Buyer's creditworthiness including, without limitation, determination that Buyer is not in default on any obligation to Seller.
- 3. PRICES.** Unless otherwise agreed: (i) all prices will be F.O.B. Destination, (ii) and all sales are subject to the terms and pricing of the applicable policy in effect on the date that the order for the Property is shipped. All invoices not paid within 30 days of the date of their issue shall be subject to a delinquency charge of 18% per annum, state equivalent sales per annum (.0041095% per day), or such lesser amount as may be the maximum rate permitted by law. Buyer agrees to pay all costs of collection including such reasonable attorneys' fees as may be allowed by law.
- 4. DELIVERY.** If a delivery is F.O.B., shipment of the Property will be in accordance with Buyer's instructions. In the absence of shipping instructions on F.O.B. deliveries, Seller may ship by such method or carrier as Seller may deem reasonable. The risk of loss for Property shall pass to the Buyer upon delivery of the Property to the Buyer or a public carrier.

The Seller shall not be liable for failure or delay in the delivery of the Property as a result in whole or in part, of fire, flood, tornado, hurricane or other acts of God; because of any casualty, accident, embargo, strike, lockout, work stoppage, war or government regulation; or for any other reason beyond the Seller's reasonable control including, but not limited to, late delivery, or nondelivery, of any part or component of the Property that is the subject thereof.
- 5. DISCLAIMER OF WARRANTIES AND LIMITATIONS OF DAMAGES.** THE PROPERTY IS WARRANTED ONLY TO THE EXTENT REFLECTED IN THE SEPARATE MANUFACTURER'S LIMITED WARRANTY APPLICABLE THERETO, THE SELLER MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY, OR FITNESS OF PURPOSE. THE SELLER SHALL NOT BE LIABLE TO BUYER FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. In case of a breach by the Seller, the Buyer's exclusive remedy shall be, at the Seller's option, repair or replacement, or the return of the Property to the Seller and refund to the Buyer of the purchase price. In no event shall the Seller's liability exceed the contract price of the Property.
- 6. ORDER CANCELLATION AND RETURN.** Buyer acknowledges that the Seller will have incurred costs in connection with the sale of the Property; that the Property is produced by the Seller as required pursuant to confirmed orders, that Buyer's failure to accept delivery of Property as to which Seller has given its acceptance will result in damage to the Seller which may be difficult to ascertain; and that liquidation damages as follows are reasonable and will be paid by Buyer if Property is not purchased:

  - (a) As to standard machines, the Buyer will pay the Seller, as liquidated damages, 25% of the agreed price of the Property.
  - (b) As to all other machines, the Buyer will pay the Seller, as liquidated damages, the following percentages of the agreed price of the Property:
    - i. 25% of the agreed price upon cancellation before production of the machine begins,
    - ii. 35% of the agreed price after production of the machine begins, and before the machine is substantially completed, and
    - iii. 50% of the agreed price after substantial completion of the machine.
- 7. DISPUTE RESOLUTION.** Any unresolved dispute arising in connection herein shall be resolved by arbitration in Toronto, Ontario, under the rules of the Arbitration Act, (Ontario).
- 8. GENERAL PROVISIONS.** The sale of the Property herein identified shall be governed by the law of Ontario. Failure or delay of the Seller in exercising any right, power or privilege shall not operate as a waiver of any such right, power or privilege. If any portion of these Terms and Conditions of Sale shall be held to be invalid or unenforceable, all other provisions shall nevertheless remain valid and enforceable in accordance with their terms.

NON STANDARD VOLTAGES: Contact Factory for availability and price. NOTE: Options prices apply only when ordered with machine.



The Dishwashing and Glasswashing Machine Specialists

*In line with policy to continually develop and improve its products, Champion Moyer Diebel reserves the right to change specifications and designs without notice.*

